

EASY WALK

WALKWAYS SYSTEMS FOR TRAPEZOIDAL METAL SHEET ROOFS



SIMPLE


Pre-assembled standard modules and fastening kits allow rapid installation in just a few steps, using standard equipment.

SAFE

Designed with a non-slip surface and to withstand loads up to a maximum of 2 kN/m², making your roof accessible on foot. Ideal for use in combination with OVERNET.


DURABLE

A system composed of steel walkways with a zinc-aluminium-magnesium coating (Magnelis), aluminium profiles, stainless steel fasteners and EPDM gaskets ensures durability and guaranteed waterproofing.

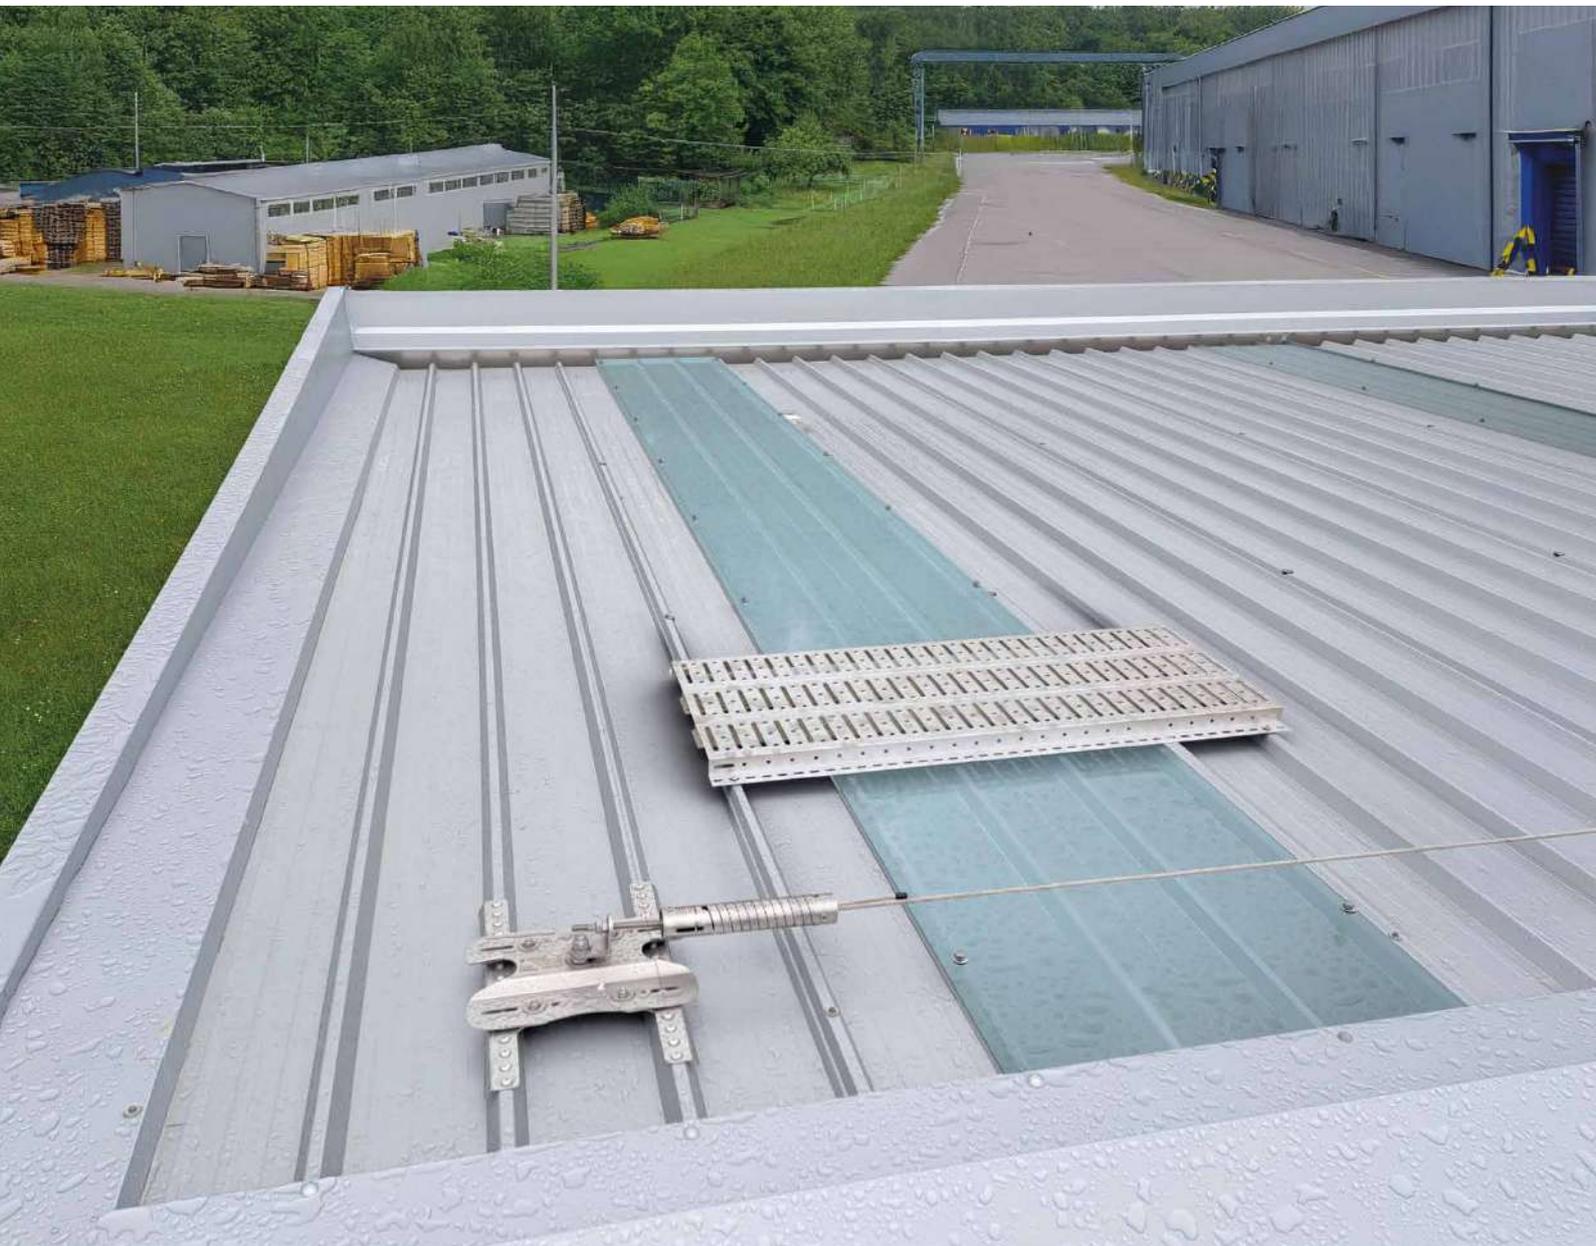


EASY WALK COMPONENTS

WALKWAY PERPENDICULAR TO FRETS

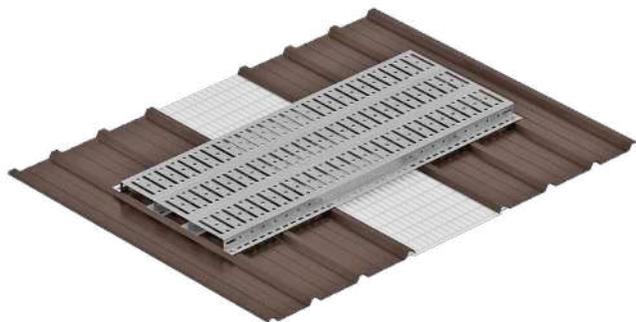

WALKWAY PARALLEL TO FRETS

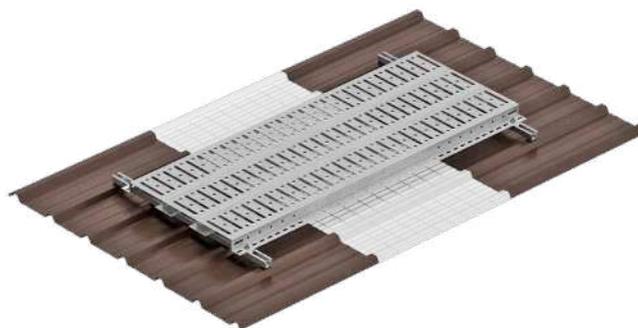

CODES AND DIMENSIONS

CODE	description	B [mm] [in]	L [mm] [in]	H [mm] [in]	weight [kg]	pcs	
EW40150	walkway 400 x 1500 mm (screws and EPDM gasket included)	400 15 3/4	1500 59 1/16	55 2 3/16	14,3	1	
EW40300	walkway 400 x 3000 mm (screws and EPDM gasket included)	400 15 3/4	3000 118 1/8	55 2 3/16	27,5	1	
EW60150	walkway 600 x 1500 mm (screws and EPDM gasket included)	600 23 5/8	1500 59 1/16	55 2 3/16	21,4	1	
EW60300	walkway 600 x 3000 mm (screws and EPDM gasket included)	600 23 5/8	3000 118 1/8	55 2 3/16	41,3	1	
EW20150INT	200 mm intermediate module to widen EW60150	200 8	1500 59 1/16	55 2 3/16	7,15	1	
EW20300INT	200 mm intermediate module to widen EW60300	200 8	3000 118 1/8	55 2 3/16	10,7	1	
EW70SUP2	kit with 2 supports for EW40150 for installation parallel to the frets	40 1 9/16	700 27 1/2	30 1 3/16	0,98	2	
EW70SUP3	kit with 3 supports for EW40300 for installation parallel to the frets	40 1 9/16	700 27 1/2	30 1 3/16	1,5	3	
EW90SUP2	kit with 2 supports for EW60150 for installation parallel to the frets	40 1 9/16	900 35 1/2	30 1 3/16	1,2	2	
EW90SUP3	kit with 3 supports for EW60300 for installation parallel to the frets	40 1 9/16	900 35 1/2	30 1 3/16	1,85	3	
EW120SUP2	kit with 2 supports for EW60150+EW20150INT for installation parallel to the frets	40 1 9/16	1200 47 1/4	30 1 3/16	1,6	2	
EW120SUP3	kit with 3 supports for EW60300+EW20300INT for installation parallel to the frets	40 1 9/16	1200 47 1/4	30 1 3/16	2,4	3	

Screws and joints always included in the single codes.