

PATROL + COPPO

LIFELINE ON SUPPORT FOR ROOFS WITH FAUX TILES

COMPLETE

The package includes fasteners and cellular rubber gaskets, to ensure roof waterproofing.

ADAPTABLE

Pre-drilled plate with holes at different distances to suit various types of sheet metal.

FAST

Quick assembly upon the completion of roofing with just a few tools.

EN 795:2012 C

CEN/TS 18418:2013

UNI 11578:2015 C




MAXIMUM NUMBER OF USERS




LOAD DIRECTION



TYPES OF APPLICATION



PATROL LIFELINE COMPONENTS

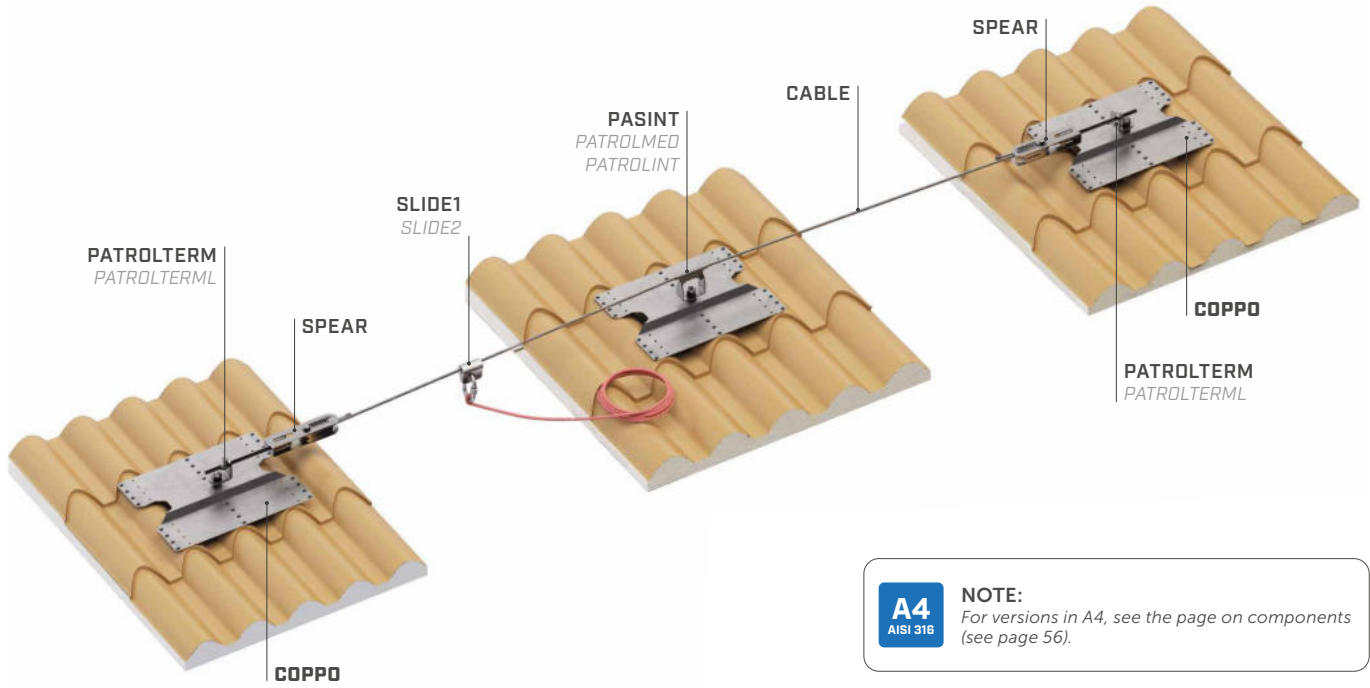

A4
AISI 316

NOTE:
For versions in A4, see the page on components (see page 56).

TECHNICAL DATA*

substructure	minimum thickness	fastening systems included
Fe	0,5 mm	rivet 6,3 x 20,2 mm with EPDM washer (x 24)
Al	0,7 mm	

			SPEAR
users		no.	
minimum span	X_{min}	[m]	2
maximum span	X_{max}	[m]	7,5
maximum deflection	Y_{max}	[m]	1,44

* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.

COPPO | CODES AND DIMENSIONS

CODE	description	material		B	H	L	pcs	
				[mm] [in]	[mm] [in]	[mm] [in]		
COPPO	support for faux tile roofing panel	AISI 304 stainless steel grade 1.4301		166 - 200 6 9/16-8	65 2 9/16	322 12 11/16	1	