

VIAVAC GBXL

FLAT GLASS LIFTING AND PLACING UP TO 1.000 KG




VACUUM GLASS LIFTER



VIAVAC GBXL

FLAT GLASS LIFTING AND PLACING UP TO 1.000 KG

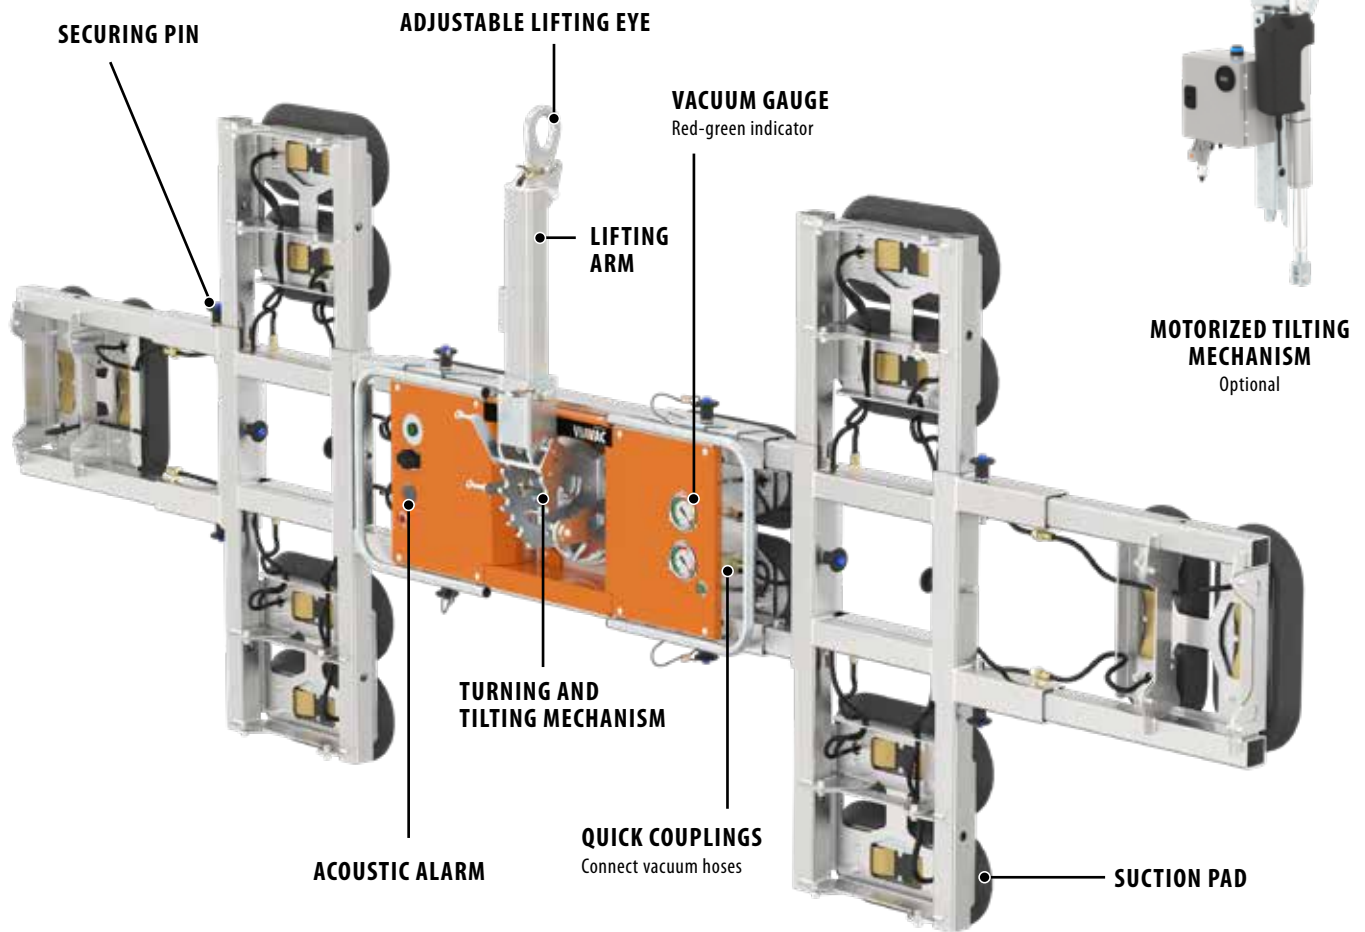

TRANSPORT FRAME
Easy to transport (optional)



SHORT LIFTING ARM
Optional



RADIO REMOTE CONTROL
Optional

FUNCTIONS

- 90° tilting mechanism with locking facility every 18°
- 360° rotation with locking facility in 4 positions
- Short lifting arm for lifting in narrow spaces (optional)
- Motorized tilting mechanism for even faster installation (optional)
- Radio remote control for suction & release (optional)

SAFETY FEATURES

- 2 independent vacuum circuits for double safety
- Integrated vacuum gauges with red / green indication
- Audible and visible low vacuum warning
- Low-battery warning
- Vacuum buffer tanks with non-return valves

SPECIFICATIONS

Configuration	GBXL-250	GBXL-500	GBXL-1000
Lifting capacity	250 kg	500 kg	1.000 kg
Machine weight	68 kg	116 kg	165 kg

Complies with European standard EN 13155

GBXL-250
250 KG

GBXL-500
500 KG

GBXL-1000
1.000 KG

